

Melody 1 Platform Lift Public Access or Domestic, External or Internal



The Specialist in Mobility Lifts Trusted for over 50 years

Buy direct from the British manufacturer

www.terrylifts.co.uk/melody1 Call 01565 752800 for free and impartial advice



Low-rise platform lift for domestic & public access

The **Melody 1 Platform Lift** offers a reliable and compact solution for both wheelchair and ambulant users. Whether installed for domestic or public access use, the lift provides a more convenient and practical alternative to a ramp. The design incorporates an external fixed ramp to eliminate the need for a pit, keeping building work to a minimum. In public buildings, Melody 1 is a convenient and cost-effective route to compliance with current disability regulations.

Standard features

- Quick installation in 1 day minimal building work required
- 🗸 No need for an enclosure or support tower
- Easy to operate, illuminated constant pressure controls
- Attractive, durable stainless steel finish (RAL colours available as an option)

Options

- Upper level gate (required when lifting height exceeds 290 mm for domestic and standard for public access)
- 🗸 Pit available for internal use only
- **Security features** (Radio enabler and Radio isolate)
- Polycarbonate infill panels to gate and carriage sides
- Bridging steps for domestic applications only

Specifications

Application range: Wheelchair users and people with impaired mobility. Internal and external locations

Safe working load: 250 kg

Maximum travel: 1000 mm

Lifting mechanism: Hydraulic scissor

Rated speed: 0.06 m/s


Electrical supply: Single phase 220/240 V ~ 50/60 Hz

Low voltage operating system: 24 VDC giving the lift a full battery back up to enable lift use in the event of a power failure

Operating temperature range: -10°C to +40°C

Safety: Full platform safe edge which stops the lift should it touch any obstacle in the down direction only. Fully interlocked carriage gate and upper gate (if required). Bellows style skirt prevents access to lifting mechanism.

Dimensions

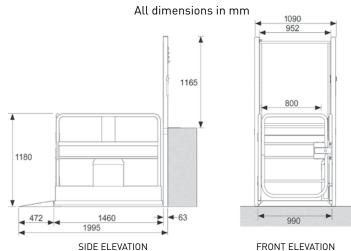



The Terry Lifts Guarantee



- ✓ Safety: Full safety features
 - **Compliance:** BS6440:2011 and Machinery Directive
 - Certification: ISO 9001:2015, ISO 14001:2015 and ISO 45001:2018
 - Origin: Designed & manufactured in the UK with over 50 years' experience



Terry Group Ltd. Unit 1-3, Longridge Trading Estate Knutsford, Cheshire WA16 8PR

Tel: +44 (0)1565 752 800 www.terrylifts.co.uk enquiries@terrylifts.co.uk



Issue date: 3/2022

